

UTILITY
PATENT APPLICATION
TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 35.C14803

First Named Inventor or Application Identifier

TOMOHIRO GOMI

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages 57

3. ☒ Drawing(s) (35 USC 113) Total Sheets 17

4. ☒ Oath or Declaration Total Pages 1

- a. ☐ Newly executed (original or copy)
b. ☒ Unexecuted for information purposes
c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting
inventor(s) named in the prior application, see
37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514
(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	56-20 =	36	X \$ 18.00 =	\$ 648.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	8-3 =	5	X \$ 78.00 =	\$ 390.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$ 260.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$ 690.00
			Total of above Calculations = \$ 1728.00		
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$ 1728.00

19. Small entity status

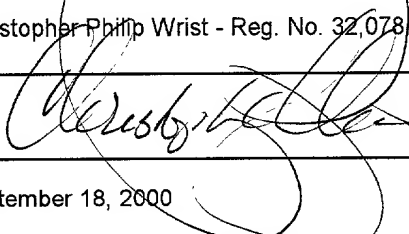
- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$1728.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	Christopher Philip Wrist - Reg. No. 32,078
SIGNATURE	
DATE	September 18, 2000

CPW\cmv

INFORMATION PROCESSOR AND PRINTER

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to an information processor and a printer used with a printing system which can allow for interrupt printing.

Related Background Art

10 In a prior printing system composed of a computer and a printer, the printer could allow for interrupt printing. When such a printer received interrupt-instructed print jobs in sequence, it performed multiple interrupt processing of these print jobs or placed an interrupt print job into waiting state.

15

SUMMARY OF THE INVENTION

 In the prior system described above, however, a print job which had been preferentially processed according to an interrupt print instruction might be interrupted by another print job. The user could not know that his/her own print job was interrupted by other print jobs in multiple.

20 In addition, even when an interrupt-instructed print job had not been processed actually, the user of that print job was not notified of it and could not know the execution status for that print job, since any multiple interrupt processing was prohibited.

25

0066433-09100
0066433-09100

5

10

15

20

25

FIG. 10 shows a graphic user interface provided

for the user to instruct a desired mode (job mode);

FIG. 11 is an explanatory view showing the configuration of a job packet;

FIG. 12 is a flowchart showing the operation of a
5 job packet generator;

FIG. 13 is a flowchart for explaining the operation of a job packet generator;

FIG. 14 is a flowchart for explaining the operation of a job pre-processor;

FIG. 15 shows an example of a user interface for
10 displaying a job list;

FIG. 16 is an explanatory view showing a job readout table;

FIG. 17 is a flowchart for explaining the
15 operation of an interrupt processor;

FIG. 18 is an explanatory view showing the status of a job table when an interrupt is processed; and

FIG. 19 shows a memory map of a memory medium in which a data processing program is stored.

20

DESCRIPTION OF PREFERRED EMBODIMENTS

FIG. 1 is a block diagram for explaining the configuration of a printing system.

In the figure, the reference numeral 1 denotes a
25 host computer (which may be an information processor or an information processing terminal) which transmits print information (also called print data) composed of

0064383-091800

print data and control code to a printer 2. The host computer 1 performs two-way communication with the printer 2 and acquires printer status information from the printer 2.

5 It should be appreciated that the printer 2 may be
an input/output device which can perform a print
operation based on print information from the host
computer and may be, for example, a copier having a
print function or a multi-function device having a
10 print function and a FAX function.

In the host computer 1, the reference numeral 11 denotes a CPU which executes various control programs and application programs stored in a ROM 13 and an auxiliary storage 14 for a variety of data processing. The reference numeral 12 denotes a RAM which functions as a working memory for the CPU 11, and the capacity of the working memory can be extended with optional RAMs.

15 The reference numeral 12 denotes a RAM which functions
as a working memory for the CPU 11, and the capacity of
the working memory can be extended with optional RAMs.

The reference numeral 15 denotes a data file manager which comprises a print information section 15A. The reference numeral 16 denotes a data setter editor which is composed of an operation unit 16A and a display unit 16B. The data setter editor 16 is implemented, for example, by executing application programs such as word processing software or spreadsheet software through the CPU 11. The reference numeral 17 denotes a control language converter/analyzer which converts and analyzes a

5 On the contrary, the printer 2 comprises a print mechanism unit to form a permanently visible image on recording paper and a control unit to control the overall printer.

10 In the printer 2, the reference numeral 21 denotes a CPU which executes various control programs stored in a ROM 23 and an auxiliary storage 24 for overall control of the devices. The reference numeral 22 denotes a RAM which functions as a working memory for the CPU 21, and the capacity of the working memory can

15 be extended with optional RAMs.

20 The reference numeral 28 denotes a transmission/reception processor which delivers print information (print data) received from the host computer 1 to a control language converter/analyzer 29. The print information is analyzed by the control language converter/analyzer 29 and then developed to image data by a retainer/developer 26. The reference numeral 25 denotes a print unit which prints the image data developed and retained by the retainer/developer

25 26 on a recording medium. The reference numeral 27 denotes a print manager which manages the output status and the like of a received print job and notifies the

host computer 1 of the current print status via the
transmission/reception processor 28. The print manager
27 also manages a list of retained print jobs and
stores management information for these print jobs in
5 the auxiliary storage 24 as required.

In the printing system as configured above, the
control language converter/analyzer 17 generates print
data and control code to be provided to the printer 2
based on the data generated by an application program.
10 The transmission/reception processor 18 controls an
interface for transmission to or reception from the
printer 2, transmits a print job composed of the print
data and the control code to the printer 2, and
receives information from the printer 2.

15 In the printer 2, the transmission/reception
processor 28 receives the print job and passes the
print data and the control code which constitute the
print job to the control language converter/analyzer
29. The control language converter/analyzer 29
20 analyzes the print job and the retainer/developer 26
generates image data based on the result of the
analysis. The print unit 25 performs printing onto
paper based on the image data.

The flow of print process will be described below
25 more specifically.

FIG. 2 is a block diagram for explaining the
network configuration for a printing system.

008760" 0004350

The reference numeral 1A denotes a host computer which is printing. The reference numeral 1B denotes a host computer which transmits an interrupt-instructed print job. The reference numeral 2 denotes a printer
5 which is shared by the host computers 1A and 1B.

The reference numeral 3 denotes a network (LAN) configured by, for example, Ethernet over which the host computer 1A, the host computer 1B, and the printer 2 can communicate with each other according to a
10 predetermined protocol.

The printer 2 is now executing a print job from the host computer 1B according to an attribute contained in the print job. The CPU 11 of the host computer 1A executes a control program to generate a
15 print job. When the user specifies an attribute for this print job and the destination of job management information for this print job, the CPU 11 of the host computer 1A adds information representing the specified attribute and destination to the print job and
20 transmits it to the printer 2 via the transmission/reception processor 18. It should be appreciated that an attribute may indicate whether an interrupt print or preferential print is specified.

The printer 2 manages job management information
25 for each of the print jobs including the print job transmitted from the host computer 1B and the print job transmitted from the host computer 1A. The CPU 11 of

5

10

20

25

print job at this point of time) to determine whether an interrupt-instructed print job can be interrupt-processed or whether a print job can be preferentially processed. The determination result as to whether a
5 print job can be interrupt-processed is added to the job management information for that print job and the host computer is notified of it according to the information representing destinations to be notified, as required.

10 The print data for each received print job is analyzed by the control language converter/analyzer 29 and then converted by the retainer/developer 26 into output data (image data) which can be printed by the print unit 25. Thus generated output data is printed
15 by the print unit 25 on a recording medium.

The print manager 27 manages print jobs to be interrupt-processed and print jobs to be normally processed in a discriminable manner, based on the determination result as to whether a print job can be
20 interrupt-processed. In addition, the print manager 27 stores print data for the print jobs to be interrupt-processed and print data for the print jobs to be normally processed in the auxiliary storage in a discriminable manner, based on the determination result
25 as to whether a print job can be interrupt-processed.

FIG. 3 is a flowchart showing an example of a first data processing procedure in the information

003460" E3E19960

5

10

15

20

25

(S401) through (S403).

At the step (S401), job information is acquired from the printer 2. At the step (S402), job management information in the job information is referred to. At
5 the step (S403), consistency of the information is checked and a list of print jobs is displayed on the display unit 16B. If a print job transmitted from the host computer 1A is specified to be interrupt-printed, a notice is also displayed that the print job is being
10 interrupt-processed.

Now, the step (S403) of FIG. 4 will be described below in detail with reference to FIG. 5. FIG. 5 is a flowchart showing an example of a third data processing procedure in the information processor according to the
15 present invention. This corresponds to the step (S403) shown in FIG. 4 to display the job information. This procedure consists of the steps (S501) through (S510).

At the step (S501), job management information is referred to. At the step (S502), a list of print jobs
20 is generated based on the job management information. FIG. 6 shows an example of a list of print jobs. In the window of FIG. 6, the document name, status, owner, and data size are displayed for each job.

Next, at the step (S503) of FIG. 5, it is
25 determined whether a notice that an interrupt print had been processed successfully is given. If it is determined that a notice that an interrupt print had

09664937 091800

been processed successfully is given, the attached job information is checked at the step (S504) and the list is displayed on the display unit at the step (S505). At the step (S510), the job management information is updated and the process proceeds to other operations.

If the printer 2 is prohibited from processing multiple interrupts and the printer 2 receives an interrupt-instructed print job while another print job is already being interrupt-processed, the print manager 27 of the printer 2 does not execute further interrupt and notifies the host computer that the interrupt-instructed print job was not processed. Then the host computer detects a failure of interrupt print.

Therefore, if it is determined at the step (S503) that a notice that an interrupt print had not been processed successfully is given, the process proceeds to the step (S506). At the step (S506), the attached job information is checked and at the step (S507), it is determined whether the user of the host computer desired the interrupt-instructed print job. If the determination result of the step (S507) is NO, the process proceeds to the step (S504). If YES, the process proceeds to the step (S508). At the step (S508), based on the determination results of the steps (S503) and (S507), it is finally determined whether the interrupt print has been processed successfully or unsuccessfully. If it is determined that the interrupt

print has been processed successfully, the process proceeds to the step (S504). If it is determined that the interrupt print has failed, a notice is displayed at the step (S509) that the interrupt print has not
5 been processed and changed to normal print. FIG. 7 shows an example of the notice given at the step (S509).

Now, a printing system which can allow for interrupt printing will be described below in detail.

10 FIG. 8 and FIG. 9 show a printing system according to an embodiment of the present invention and each of them is a block diagram showing the feature configuration of a printing system which can implement the mechanism for transmitting a print job from a host
15 computer to a printer, for acquiring information for the printer, and for setting environmental conditions.

The printing system comprises a host computer 200 for generating a print job, a printer 300 for actually printing on paper based on the print job, and
20 interfaces 210 and 311 for connecting the host computer 200 and the printer 300. Although the interfaces 210 and 311 may be a local interface specified in the IEEE 1284 standard or a network interface such as Ethernet, the following description addresses the case where a
25 local interface is used.

In FIG. 8, the host computer 200 comprises an application 201, a printer driver 202, a transmission

buffer 203, an I/F driver 204, a utility 205, a logic channel controller 206, and a job packet generator 207.

5 The application 201 allows the user to manipulate graphical user interfaces and generates desired image data accordingly. The printer driver 202 converts the image data generated by the application 201 into page description language (hereinafter abbreviated as PDL) data which can be printed by the printer 300. The transmission buffer 203 temporarily stores the PDL data generated by the printer driver 202. The job packet generator 207 generates a predetermined job packet from the PDL data stored in the transmission buffer 203 and job information held by the application 201.

15 The utility 205 allows the user to manipulate graphical user interfaces to check the status of the printer 300, to check the status of a transmitted print job, to cancel the print job, to interrupt the print job, to suspend the print job, or to resume the print job and in response to the user manipulation, generates a management packet which can be interpreted by the printer 300.

25 The logic channel controller 206 assigns the job packet and the management packet to different channels for multiplexing the transport layer among the seven layers as specified by OSI. The I/F driver 204 makes the conversion from logical data to electrical signals and vice versa for communication with the interface

091300 091300 091300

210.

In FIG. 9, the printer 300 comprises an I/F driver 301, a logic channel controller 302, a job pre-processor 303, a job spooler 304, a device database 305, a PDL translator 306, a draw buffer 307, a drawer 308, a printer engine 309, an information manager 310, an interrupt processor 312, and a job table 313.

0966433 091800

The I/F driver 301 makes the conversion from logical data to electrical signals and vice versa for communication with the interface 311. The logic channel controller 302 assigns the job packet and the management packet to different channels for multiplexing the transport layer among the seven layers as specified by OSI. The job pre-processor 303 analyzes the received job packet and stores the job information for the print job in the device database 305 and the PDL data in the job spooler 304, separately.

The job spooler 304 is made up of an HDD, a flash memory, a DRAM, or other bulk memory devices to temporarily store the PDL data for the print job until the print job is completed. At the point of time when it is detected that the ejection of the last page in the print job has been completed, the PDL data for the print job stored in the job spooler 304 is deleted or invalidated.

The job table 313 describes the order of

processing print jobs. The PDL translator 306 selects the print jobs in order as described by the job table 313, analyzes the job information stored in the device database 305 and the PDL data stored in the job spooler 304 for each of the print jobs to generate intermediate data which can be drawn in real time (this operation is also referred to as "translation"), and then stores the intermediate data in the draw buffer 307.

The draw buffer 307 temporarily holds the intermediate data in pages until the print job is completed. The drawer 308 acquires the intermediate data from the draw buffer 307, performs renderings on the intermediate data in real time with the paper carriage in the printer engine 309, and then transmits video data to the printer engine 309. The printer engine 309 performs physical printing on paper based on the video data transmitted by the drawer 308, using a known electrophotographic technique.

The information manager 310 receives the management packet transmitted from the host computer 200, acquires information from the device database 305 upon request, executes an instruction to cancel a print job (cancellation request), an instruction to interrupt (interrupt request), an instruction to suspend a print job (print suspension request), an instruction to resume a print job (print resumption request), or an instruction to preferentially print (preferential print

00564333 091800

request), and detects any job end or device failure to issue a management packet to autonomously notify the host computer 200 of it.

5 The interrupt processor 312 processes an actual interrupt when an instruction to interrupt a print job is executed.

10 Data communication between the logic channel controller 206 in the host computer 200 and the logic channel controller 302 in the printer is multiplexed at the transport layer level, for example, according to TCP/IP for network communication or according to any protocol specified in the IEEE 1284/IEEE 1284.4 standard for local communication. This will not be further described here.

15 A job packet logically transmitted from the job packet generator 207 is received by the job pre-processor 303. The logical path over which the job packet flows is called a job channel. A management packet is communicated between the utility 205 and the
20 information manager 310. The logical path over which the management packet flows is called a management channel. It should be appreciated that both channels are defined to allow for two-way communication but the job channel in the present embodiment may be a one-way
25 channel from the host computer to the printer. In addition, it should be appreciated that the job channel and the management channel are multiplexed at the

006543E3 091800

transport layer level among the seven layers as specified by OSI and the flow processing for one channel cannot affect the other.

Now, the structure of job and management packets will be described below. Job and management packets are defined according to the protocol for the application layer and each has a packet structure composed of a header section and a data section (also referred to as a parameter section). A print job is composed of a plurality of job packets. The collection of job packets composing a print job is called a job script.

FIG. 11 is an explanatory view showing the structure of a job packet. In the figure, byte numbers are shown in the left column and bit numbers in each byte are shown in the top row. An operation code in bytes 0 to 1 is a 2-byte (16-bit) ID which indicates the function of the packet. For a job packet, it can take on one of the following values:

- 0x0201: Job start operation
- 0x0202: Job attribute setting operation
- 0x0204: PDL data transmission operation
- 0x0205: Job end operation.

A block number in bytes 2 to 3 is the number used to indicate the correspondence between a job packet transmitted by the transmitter and a reply from the receiver to respond any reply request from the

transmitter. For example, suppose that the host computer 200 transmits job packets with block numbers 1, 2, 3 in sequence and an error packet with block number 2 is returned. In this case, the host computer can know that an error occurs in the second job packet.

A parameter length in bytes 4 to 5 indicates the length of a data section in bytes, ranging from 0 to 64 Kbytes.

Bytes 6 to 7 have some bits indicating various
10 flags for a job packet and these flags can be set some
values as described below.

Error flag: If this flag is set to 1, it indicates that some error occurs in the printer. This flag is attached to a return packet transmitted from the printer 300 to the host computer 200.

Notice flag: If this flag is set to 1, it indicates that this is not a reply to respond a reply request packet from the host computer 200 to the printer 300 and that the printer 300 notifies the host computer 200 that there is something to be communicated.

Continuation flag: If this flag is set to 1, it indicates that all pieces of data cannot be contained in a data section and the remaining pieces of data are transmitted in the next job packet. The next job packet must have the same operation code and block number as those of the current packet.

5 Reply request: This flag is set to 1 when the host computer 200 requests a reply packet from the printer 300 to its request packet. If the flag is set to 0, no reply packet is returned when the request packet is normally processed. If any error occurs in the printer, a reply packet with the error flag set to 1 is always issued regardless of whether the reply request flag is set to 0 or 1.

10 A user ID in bytes 8 to 9 and a password in bytes 10 to 11 are used for authentication when security restrictions are imposed on any operation to be performed with packets.

15 Byte 12 and succeeding bytes compose a data section in which additional data corresponding to any specified operation code is stored. For a job start operation, a job mode (operation mode) is described as additional data. Operation mode codes which can be specified are as follows:

20 0x01: Normal processing of a print job. The print job is added as a normal print job to the end of the queue in the printer and normally processed on schedule.

25 0x04: Interrupt processing of a print job. Since the print job is handled as an interrupt print job, all other print jobs are suspended and the interrupt print job is preferentially processed.

FIG. 10 shows a graphic user interface provided by

008160" E84960

5
10

15
20

0x0101: Job name

0x016a: Job size

25

Other IDs can be assigned to job attributes such as number of copies and monochrome/color depending on

the functions of the printer.

For a PDL data transmission operation, the PDL data is placed in the data section as additional data. A job packet can have up to the maximum parameter
5 length of data, that is, up to 64 KB of data and if more data is to be transmitted, excess data is divided into a plurality of job packets having the PDL data transmission operation code and then transmitted. In this case, the continuation flag is set to 1.

10 For a job end operation, there exists no additional data.

Now, the job packet generator 207 in the host computer will be described below. FIG. 12 and FIG. 13 are a flowchart showing the operation of the job packet
15 generator 207. When the application 201 selects a print instruction, the printer driver 202 is activated first. After the printer driver 202 has stored print data in the transmission buffer 203, the job packet generator 207 starts its operation.

20 Firstly, at the step 1201, it is determined whether a print job in question is an interrupt print. An interrupt print will be executed if it has been specified by the user on the user interface property screen of the printer driver 202.

25 If it is an interrupt print, the operation mode is set to 0x04 at the step 1202. If it is not an interrupt print, the operation mode is set to 0x01 at

008760" E8E49560

the step 1210.

Next, at the step 1204, a job packet with the job start operation code (=0x0201) in the operation code area is issued to the logic channel controller 206. At this point of time, an operation mode value is set in the data section of the job packet to indicate whether the print job is a normal print job, an interrupt print job, a print suspension job, or a print promotion job.

Thereafter, all operations are used to set job information for the print job until a job end operation instruction is issued.

At the step 1205, the job name is set. A job packet with the job attribute setting operation code (0x0202) in the operation code area and with a job attribute ID which indicates a job name setting (=0x0101) and a name which is the job attribute value in the data section is generated and issued to the logic channel controller 206.

At the step 1206, the job owner is set. A job packet with the job attribute setting operation code (0x0202) in the operation code area shown in FIG. 11 and with a job attribute ID which indicates a job owner setting (=0x0103) and an owner name which is the job attribute value in the data section is generated and issued to the logic channel controller 206.

At the step 1207, the job size is set. A job packet with the job attribute setting operation code

00000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000

(0x0202) in the operation code area shown in FIG. 11 and with a job attribute ID which indicates a job size setting (=0x016a) and a job data size which is the job attribute value in the data section is generated and
5 issued to the logic channel controller 206.

At the step 1208, the destination address for a job end notice of the current print job ("notice address") is set. The job end means that the ejection of the last page in the print job has been completed.
10 A job packet with the job attribute setting operation code (0x0202) in the operation code area shown in FIG. 11 and with a job attribute ID which indicates a notice address setting (=0x0002) and a job end notice address which is the job attribute value in the data section is
15 generated and issued to the logic channel controller 206.

A notice address typically indicates a transmission address of the host computer which transmits a print job. If the transmitter is a local
20 interface according to the 1284.4 standard and the socket ID is 0x10, the notice address will be the string "1284.4:0x20." If the transmitter has an IP address of 172.16.1.1 according to TCP/IP and the port number is 0xb9b9, the notice address will be the string
25 "TCP/IP:172.16.1.1:0xb9b9."

At the step 1209, the size in bytes of PDL data to be transmitted is assigned to the variable "Dsize".

008760 094333 094300

At the step 1301, the value of the variable Dsize is checked to determine whether it is larger than 64 K. The size of data which can be stored in the data section of a job packet is limited to 64 Kbytes at the maximum because the parameter length in the packet header is represented by 16 bits. Therefore, excess data is divided into a plurality of job packets and then these packets are issued.

If the size of the PDL data is larger than 64 K, the continuation flag in the packet header shown in FIG. 11 is set to 1 at the step 1305 and then at the step 1307, a job packet with the PDL data transmission operation code (0x0204) in the operation code area shown in FIG. 11 and with 64 Kbytes of PDL data taken from the transmission buffer 203 in the data section is generated and issued to the logic channel controller 206. In addition, at the step 1308, the size of the PDL data is reduced from Dsize by 64 K which is the size of the transmitted data and the process returns to the branch step 1301.

If the variable Dsize which is the size of the PDL data is 64 K or less at the step 1301, one more job packet with the PDL data transmission operation code completes the transmission of all PDL data. In this case, the continuation flag in the packet header shown in FIG. 11 is set to 0 at the step 1302 to indicate that this is the last PDL data transmission and then at

5

10

15

20

25

5

10

15

20

25

5

10

20

25

information) is completed, the process returns to the step 1408 to receive a third job packet.

Then, at the step 1411, it is determined whether the operation code in the received job packet is the PDL data transmission operation code. If it is the PDL data transmission operation code, the PDL data is stored in the job spooler 304 at the step 1412. At the point of time, the PDL data is stored by using as a key the job ID obtained at the step 1404 and when the PDL data is taken out later, the job ID is used as a key again. The job spooler 304 associates the job ID with the PDL data for storing the PDL data. When the PDL data is added to the job spooler 304, the process returns to the step 1408 to receive a fourth job packet. If the operation code is not the PDL data transmission operation code at the step 1411, the process proceeds to the step 1413.

At the step 1413, it is determined whether the operation code in the job packet is the job end operation code. If it is the job end operation code, the process exits from the loop to return to the initial step 1401.

If the operation code in a job packet is not any of the predefined ones, the job packet is determined to be illegal and cancelled at the step 1414.

With the process described above, the job pre-processor 303 distributes the job information for the

job packet to the device database 303 and the PDL data in the job packet to the job spooler 304.

Now, the utility 205 will be described below. The utility 205 is used by the user to display a list of
5 print jobs and attributes, to cancel a print job, to instruct an interrupt print job, to suspend or resume a print job, or to promote a print job.

An operation instructed with the utility 205 is actually performed by communicating a management packet
10 between the host computer 200 and the printer 300 through a management channel. Like job packets, a management packet has the data structure as shown in FIG. 11. Information items in a packet header contained in bytes 0 to 11 are similar to those for a
15 job packet. It should be appreciated, however, that a management packet has the following operation codes:

0x010b: Print job cancellation
0x0123: Interrupt print job instruction
0x010d: Print job list acquisition
20 0x0120: Print job suspension
0x0121: Print job resumption
0x0022: Print job promotion
0x0105: Attribute setting
0x0106: Attribute acquisition
25 0x0110: Printer stop
0x0111: Printer restoration
0x011a: Printer reset.

003760" EEE+950

When a print job is transmitted to the printer 300 in job packets, the printer 300 stores the job ID and job information in the device database 305 with the aid of the job pre-processor 303.

The information manager 310 knows that this is a print job list acquisition operation based on the operation code in the received management packet, acquires print job list information stored in the device database 305, and transmits a reply packet with the list information. In the data section of the reply packet, the number of print jobs recognized by the printer 300 and a list of job IDs of the print jobs are stored.

and size information through a job attribute setting operation, the utility 205 can acquire detailed information for the print job. For this purpose, the utility 205 transmits a management packet with the attribute acquisition operation code (=0x0106) to the printer 300 after it has acquired the list of print jobs. In the data section of the management packet, the job ID of a print job to be acquired and the attribute ID of an attribute to be acquired are specified. For example, when the user wants to acquire the job name of a print job with the job ID 1, the job ID 1 and the attribute ID 0x0101 will be specified.

The information manager 310 knows that this is an attribute acquisition operation based on the operation code in the received management packet, acquires an attribute value for the specified attribute ID and the specified job ID from the device database 305, and transmits a reply packet with the value.

FIG. 15 shows a user interface for displaying a job list with the utility 205. In FIG. 15, a job list for a printer with the device name "PRNT-1" is displayed. It should be appreciated that there exists only a print job.

The utility 205 issues a management packet with the print job list acquisition operation code to acquire a list of print jobs, and then issues a management packet with the attribute acquisition

5 FIG. 15 shows that there exists a print job with
the job name "http://www...", that this print job is in
a printing status, and that the owner name is "toitoi"
and the size is 16 Kbytes.

When the user selects the "INTERRUPT PRINT," a management packet with the interrupt print job instruction operation code (=0x0123) is transmitted to the printer 300. In the data section of this management packet, the job ID of an interrupt-instructed print job is stored.

25 Lastly, the job table 313 will be described below.
 FIG. 16 is an explanatory view showing job tables. The
 PDL translator 306 selects print jobs in order as
 described in the job table 313 and then translates the

PDL translator 306 has translated all the PDL data for the print job with the job ID 2, the pointer 1601 will point to the print job with the job ID 3.

5 The suspension flag indicates whether an instruction to suspend a print job is issued. The print job is suspended if the suspension flag is set to True (T), and the print job is not suspended if the suspension flag is set to False (F). It should be appreciated that any of the print jobs with the job IDs 10 1 to 5 in the job table as shown in FIG. 16 is not instructed to suspend and there exists no suspended print job.

Now, the interrupt processing will be described below.

15 When the job pre-processor 303 recognizes an interrupt-instructed print job at the step 1405 shown in FIG. 14, it instructs the interrupt processor to execute an interrupt at the step 1415. At the same time, the job ID of the interrupt-instructed print job 20 is also notified.

FIG. 17 is a flowchart showing the operation of the interrupt processor 312. Firstly, at the step 1700, the interrupt processor 312 determines whether an interrupt is instructed. If an interrupt is 25 instructed, it instructs the PDL translator 306 to suspend a print job in progress at the step 1701. When the PDL translator 306 receives such an instruction, it

0966433 091800
003T60 6364960

5
10
15
20
25

5
10
15
20
25

15
20
25

25

table 313. Then, the pointer 1601 moves to point to the job ID of this print job. The job ID is notified by the job pre-processor 303 along with an interrupt instruction. Thus, the job table 313 shows that the interrupt-instructed print job is the next print job to be processed.

Next, at the step 1707, the PDL translator 306 is instructed to resume. Then the PDL translator 306 looks at the pointer 1601 in the job table 313 and takes out the PDL data for a print job pointed by the pointer 1601 in the job table 313 (that is, an interrupt-instructed print job) from the job spooler 304 for translation. At the step 1708, the drawer 308 is instructed to resume and lastly, at the step 1709, the printer engine is instructed to resume.

FIG. 18 is an explanatory view showing the status of the job table 313 when an interrupt is processed. In the figure, no suspension flag is shown. The job table 18-1 shows that normal print jobs with the job IDs 1 to 4 are registered therewith and the job table 18-2 shows that an interrupt-instructed print job with the job ID 5 is added. When the interrupt-instructed print job with the job ID 5 is added, at the step 1706 in FIG. 17, the interrupt processor 312 adds the print job with the job ID 5 to the head of the job table, thus resulting in the job table 18-2.

When the PDL translator 306 receives an

003150" 884950

instruction to resume, the print job with the job ID 5,
the print job with the job ID 1, the print job with the
job ID 2, the print job with the job ID 3, and the
print job with the job ID 4 are translated in this
5 order because the PDL translator 306 processes the
print jobs in order as described in the job table 313.

When the print job with the job ID 1 as shown in
the job table 18-1 is interrupted during the ejecting
operation, at the step 1705 in FIG. 17, the number of
10 pages which have been ejected during the interrupted
print job with the job ID 1 is stored in the device
database 305 as job information for that print job.
Then the print job with the job ID 1 is added to the
head of the job table again and although the PDL
15 translator 306 starts to translate the PDL data for
that print job, the drawer 308 skips the ejected pages
based on the ejected page number information for that
print job. When the interrupted print job is restored,
this can avoid any duplication of printed pages before
20 and after the interrupt is executed and prevent any
page from being printed twice.

It should be appreciated that in the printing
system as described above, the print data and job
management information are stored in the auxiliary
25 storage but such data can be also recorded on an FD,
MO, or other external memory medium. In addition, the
management information can be modified by an

application having the data setter editor 16 to the user's desired settings.

It should be further appreciated that in the printing system as described above, the host computer 1 is responsible for the print job control and display operations but the printer 2 may perform these operations alone or in cooperation with the host computer 1.

It should be further appreciated that an interrupt-instructed print job is processed in the above description but a preferential-instructed print job may be processed in a similar manner.

It should be further appreciated that the above-mentioned network environment includes parallel-connected devices as shown in FIG. 17 but the present invention may work with an environment locally connected to a server.

FIG. 19 shows a memory map of a memory medium to store various data processing programs which can be read by the information processor and the printer according to the present invention. It should be appreciated that information to manage the programs stored in the memory medium, for example, version information and creators (not shown) may be also stored and information dependent on the OS used by a program reader, for example, the icon identifying a program may be stored as well.

0066433 051200

In addition, program-dependent data is also managed with a directory shown in FIG. 19. A program used to install another program in a computer and a program which decompresses a compressed program to be installed may be stored.

The features according to the present embodiment may be accomplished by a host computer through programs which are externally installed. In this case, information including programs may be provided to output devices through a CD-ROM, flash memory, FD, or other external memory medium or through a network.

From the foregoing, the objects of the present invention can be attained by providing a system or device with a memory medium in which software program codes to implement the features according to the present embodiment are stored and then causing a computer (or CPU or MPU) in the system or device to read the program codes stored in the memory medium for execution.

For this purpose, the program codes themselves to be read from the memory medium can implement the new features of the present invention and the memory medium in which the program codes are stored can constitute the present invention.

Memory media used to provide program codes include, for example, a floppy disk, a hard disk, an optical disk, a magneto-optical disk, a CD-ROM, a CD-R,

a magnetic tape, a nonvolatile memory card, a ROM, and an EEPROM.

The features according to the present embodiment described above can be implemented by executing the program codes read by the computer and they may be implemented even if the OS (operating system) running on the computer performs some or all of actual operations according to instructions from the program codes.

Moreover, the features according to the present embodiment described above may be implemented even if the program codes read from the memory medium are written into memory mounted on an expansion board inserted into the computer or an expansion unit connected to the computer and a CPU mounted on the expansion board or the expansion unit performs some or all of actual operations according to instructions from the program codes.

WHAT IS CLAIMED IS:

1. An information processor which can communicate with a printer, comprising:

generation means for generating a print job to be
5 processed by said printer;

instruction means for instructing said print job to be interrupt printed by said printer;

detection means for detecting that said print job instructed by said instruction means to be interrupt
10 printed has not been interrupt printed, based on information from said printer; and

notification means for notifying the user that said print job has not been interrupt printed, based on information received by said detection means.

15

2. The processor according to claim 1, wherein said notification means causes a display unit to display that said print job has not been interrupt
20 printed.

20

3. The processor according to claim 2, wherein said notification means causes said display unit to display an icon indicating that said print job has not been interrupt printed.

25

4. The processor according to claim 1, wherein said detection means receives from said printer some

00360" 09100

information indicating that said print job instructed by said instruction means to be interrupt printed has not been interrupt printed.

5 5. The processor according to claim 1, wherein said detection means receives some information indicating that an interrupt print of a print job has failed and the owner of said print job and determines whether the owner of said print job is the user to
10 detect that said print job instructed by said instruction means to be interrupt printed has not been interrupt printed.

15 6. The processor according to claim 1, wherein said notification means notifies the user that said print job has not been interrupt printed but normally printed.

20 7. A print controller which can process print jobs from a plurality of information processors, comprising:

interrupt means for suspending the print operation for a print job and executing an interrupt print of another print job according to an instruction for
25 interrupt print;

determination means for determining whether said interrupt print is being executed by said interrupt

006433"091800
008160"0304960

means; and

decision means for, in response to reception of an interrupt-instructed print job, deciding whether a received print job is interrupt printed, based on the determination result from said determination means.

8. The controller according to claim 7, further comprising prohibition means for prohibiting multiple interrupts,

10 wherein said decision means decides that a received print job is not interrupt printed if multiple interrupts are prohibited by said prohibition means.

9. The controller according to claim 7, wherein execution of multiple interrupts means that an interrupt print is further executed while a previous interrupt print is being executed by said interrupt means.

20 10. The controller according to claim 7, wherein said print controller is a print controller for said printer.

25 11. The controller according to claim 7, wherein said print controller is a print controller for a device having a copy function.

003150" E3E49960

5

10

15

20

25

be interrupt printed by said printer;

detection step for detecting that said print job

instructed by said instruction step to be interrupt
printed has not been interrupt printed, based on
information from said printer; and

notification step for notifying the user that said
5 print job has not been interrupt printed, based on
information received by said detection step.

16. The method according to claim 15, wherein
said notification step causes a display unit to display
10 that said print job has not been interrupt printed.

17. The method according to claim 16, wherein
said notification step causes said display unit to
display an icon indicating that said print job has not
15 been interrupt printed.

18. The method according to claim 15, wherein
said detection step receives from said printer some
information indicating that said print job instructed
20 by said instruction step to be interrupt printed has
not been interrupt printed.

19. The method according to claim 15, wherein
said detection step receives some information
25 indicating that an interrupt print of a print job has
failed and the owner of said print job and determines
whether the owner of said print job is the user to

096433 091300

detect that said print job instructed by said instruction step to be interrupt printed has not been interrupt printed.

5 20. The method according to claim 15, wherein said notification step notifies the user that said print job has not been interrupt printed but normally printed.

10 21. A print control method for processing print jobs from a plurality of information processors, comprising:

 interrupt step for suspending the print operation for a print job and executing an interrupt print of
15 another print job according to an instruction for interrupt print;

 determination step for determining whether said interrupt print is being executed by said interrupt step; and

20 decision step for, in response to reception of an interrupt-instructed print job, deciding whether a received print job is interrupt printed, based on the determination result from said determination step.

25 22. The method according to claim 21, further comprising prohibition step for prohibiting multiple interrupts,

003160" E8E4960

wherein said decision step decides that a received print job is not interrupt printed if multiple interrupts are prohibited by said prohibition step.

5 23. The method according to claim 21, wherein execution of multiple interrupts means that an interrupt print is further executed while a previous interrupt print is being executed by said interrupt step.

10 24. The method according to claim 21, wherein said print control method is executed by said printer.

15 25. The method according to claim 21, wherein said print control method is executed by a device having the copy function.

20 26. The method according to claim 21, further comprising transfer step for transferring to an information processor some information indicating that an interrupt print of a received print job has failed if it is decided that said received print job is not interrupt printed.

25 27. The method according to claim 21, wherein a received print job is processed in normal order if it is decided that said received print job is not

008160" 8349360

interrupt printed.

28. The method according to claim 27, further comprising transfer step for transferring to an
5 information processor some information indicating that a received print job is processed in normal order if it is decided that said received print job is not interrupt printed.

10 29. A program executed by an information processor which can communicate with a printer, wherein said program causes said information processor to execute:

generation step for generating a print job to be
15 processed by said printer;

instruction step for instructing said print job to be interrupt printed by said printer;

detection step for detecting that said print job instructed by said instruction step to be interrupt
20 printed has not been interrupt printed, based on information from said printer; and

notification step for notifying the user that said print job has not been interrupt printed, based on information received by said detection step.

25 30. The program according to claim 29, wherein said notification step causes a display unit to display

that said print job has not been interrupt printed.

31. The program according to claim 30, wherein
said notification step causes said display unit to
5 display an icon indicating that said print job has not
been interrupt printed.

32. The program according to claim 29, wherein
said detection step receives from said printer some
10 information indicating that said print job instructed
by said instruction step to be interrupt printed has
not been interrupt printed.

33. The program according to claim 29, wherein
15 said detection step receives some information
indicating that an interrupt print of a print job has
failed and the owner of said print job and determines
whether the owner of said print job is the user to
detect that said print job instructed by said
20 instruction step to be interrupt printed has not been
interrupt printed.

34. The program according to claim 29, wherein
said notification step notifies the user that said
25 print job has not been interrupt printed but normally
printed.

008750" EEE4960

35. A program executed by a print controller which processes print jobs from a plurality of information processors, wherein said program causes said print controller to execute:

5 interrupt step for suspending the print operation for a print job and executing an interrupt print of another print job according to an instruction for interrupt print;

10 determination step for determining whether said interrupt print is being executed by said interrupt step; and

15 decision step for, in response to reception of an interrupt-instructed print job, deciding whether a received print job is interrupt printed, based on the determination result from said determination step.

20 36. The program according to claim 35, wherein said program causes said print controller to execute prohibition step for prohibiting multiple interrupts, and

 wherein said decision step decides that a received print job is not interrupt printed if multiple interrupts are prohibited by said prohibition step.

25 37. The program according to claim 35, wherein execution of multiple interrupts means that an interrupt print is further executed while a previous

008160" EEE4950

38. The program according to claim 35, wherein
5 said program is executed by said printer.

10

15

20

25

interrupt printed.

43. A computer-readable memory medium which stores a computer program executed by an information processor which can communicate with a printer, wherein said program causes said information processor to execute:

generation step for generating a print job to be processed by said printer;

instruction step for instructing said print job to be interrupt printed by said printer;

detection step for detecting that said print job instructed by said instruction step to be interrupt printed has not been interrupt printed, based on information from said printer; and

notification step for notifying the user that said print job has not been interrupt printed, based on information received by said detection step.

44. The memory medium according to claim 43, wherein said notification step causes a display unit to display that said print job has not been interrupt printed.

45. The memory medium according to claim 44, wherein said notification step causes said display unit to display an icon indicating that said print job has

5

20

15

20

25

interrupt step for suspending the print operation for a print job and executing an interrupt print of another print job according to an instruction for interrupt print;

5 determination step for determining whether said interrupt print is being executed by said interrupt step; and

10 decision step for, in response to reception of an interrupt-instructed print job, deciding whether a received print job is interrupt printed, based on the determination result from said determination step.

15 50. The memory medium according to claim 49, wherein said program causes said print controller to execute prohibition step for prohibiting multiple interrupts, and

20 wherein said decision step decides that a received print job is not interrupt printed if multiple interrupts are prohibited by said prohibition step.

25 51. The memory medium according to claim 49, wherein execution of multiple interrupts means that an interrupt print is further executed while a previous interrupt print is being executed by said interrupt step.

52. The memory medium according to claim 49,

003160" E8E4960

wherein said program is executed by said printer.

53. The memory medium according to claim 49,
wherein said program is executed by a device having the
5 copy function.

54. The memory medium according to claim 49,
further comprising transfer step for transferring to an
information processor some information indicating that
10 an interrupt print of a received print job has failed
if it is decided that said received print job is not
interrupt printed.

55. The memory medium according to claim 49,
15 wherein a received print job is processed in normal
order if it is decided that said received print job is
not interrupt printed.

56. The memory medium according to claim 55,
20 further comprising transfer step for transferring to an
information processor some information indicating that
a received print job is processed in normal order if it
is decided that said received print job is not
interrupt printed.

008760" EBFH960

ABSTRACT OF THE DISCLOSURE

With the present invention, an interrupt print job processed according to an interrupt print instruction can be prohibited from being interrupted by another print job in multiple. With the present invention, if
5 an interrupt-instructed print job has not been processed actually, the user of that print job can be notified of it.

003760" E243550

FIG. 1

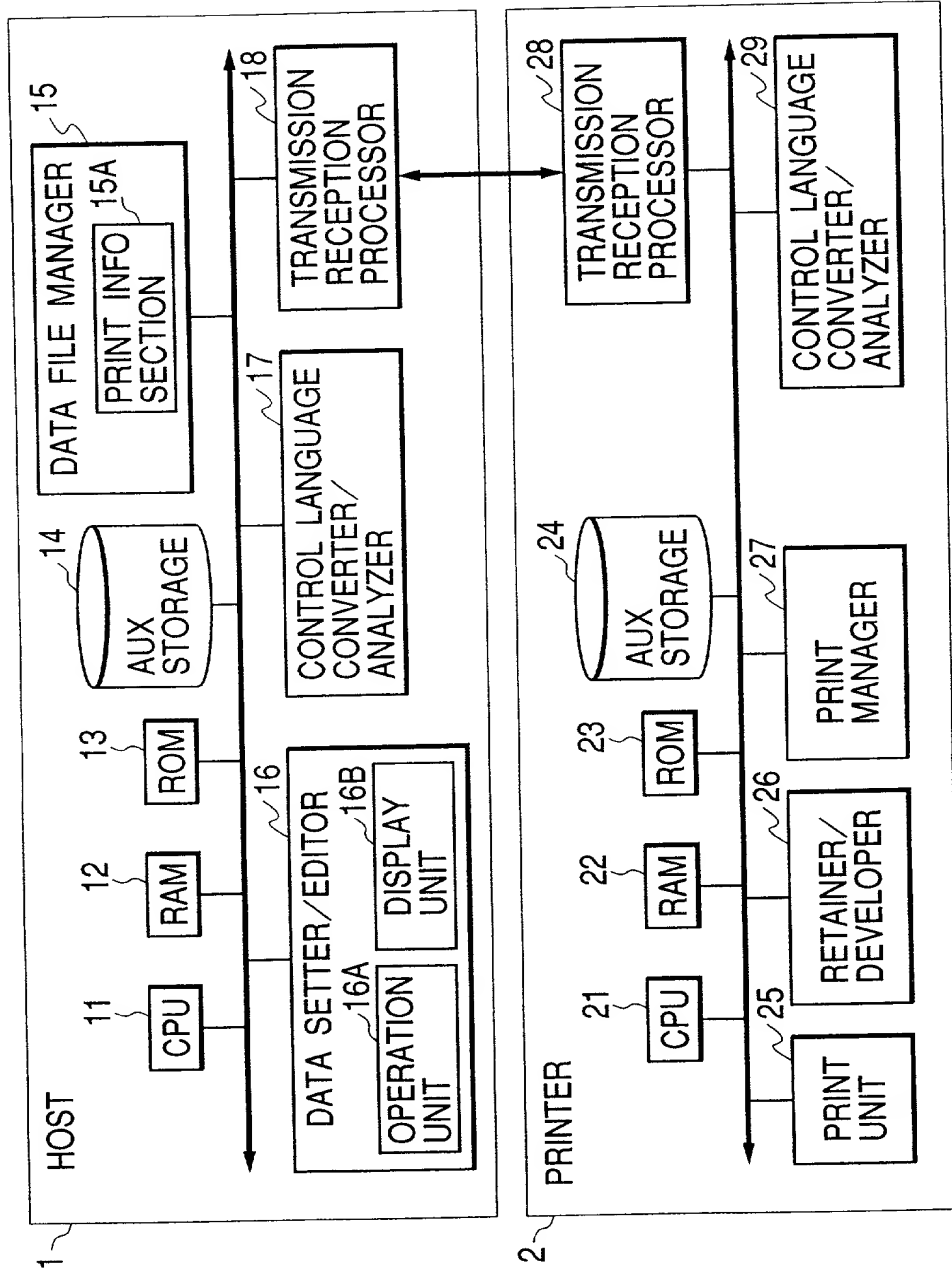


FIG. 2

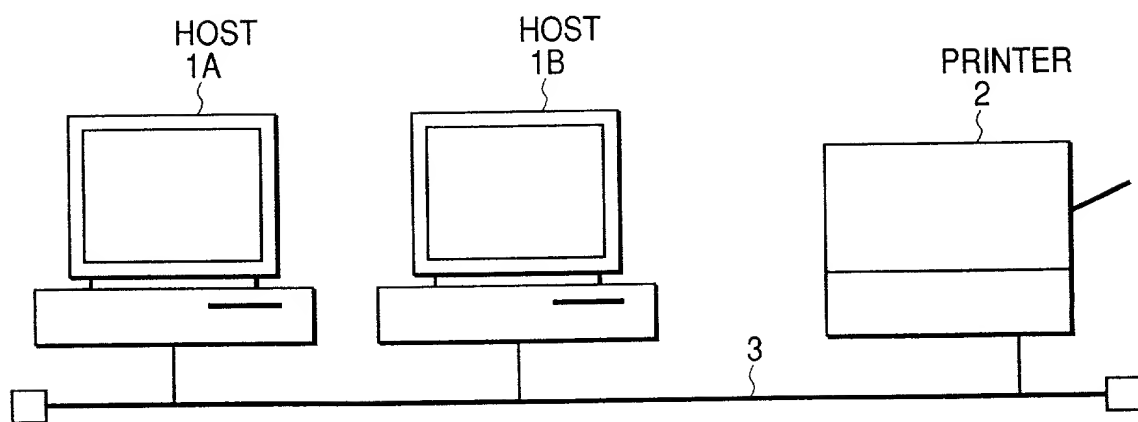


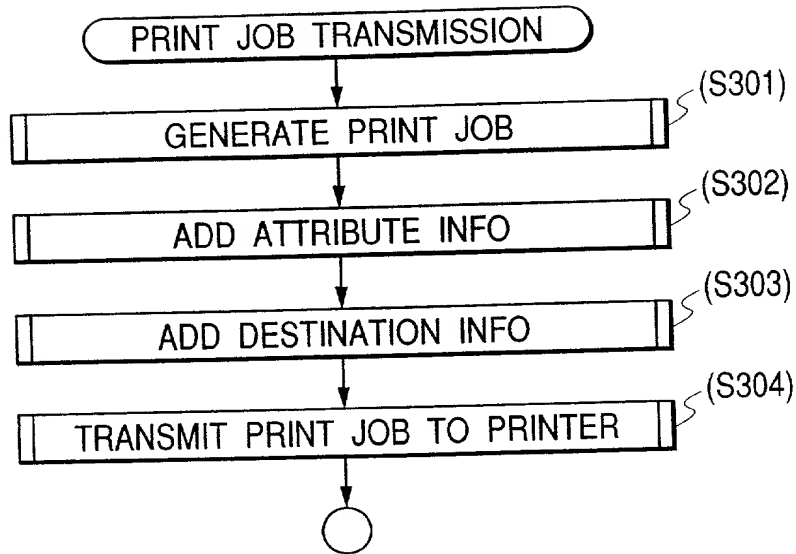
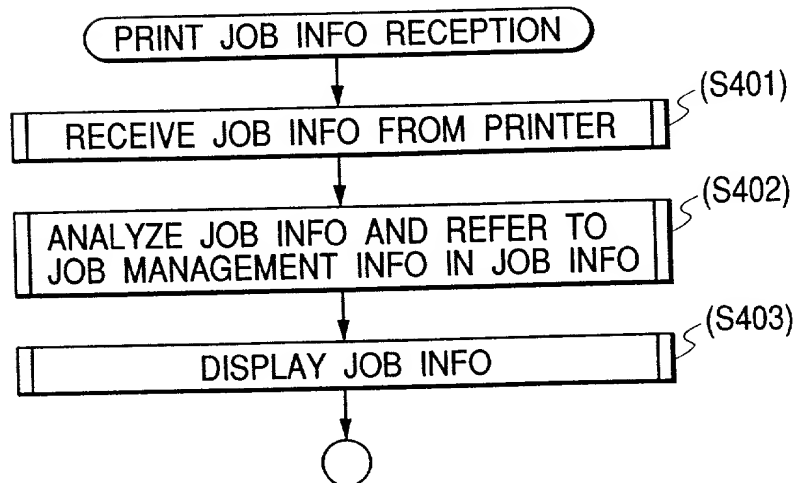
FIG. 3**FIG. 4**

FIG. 5

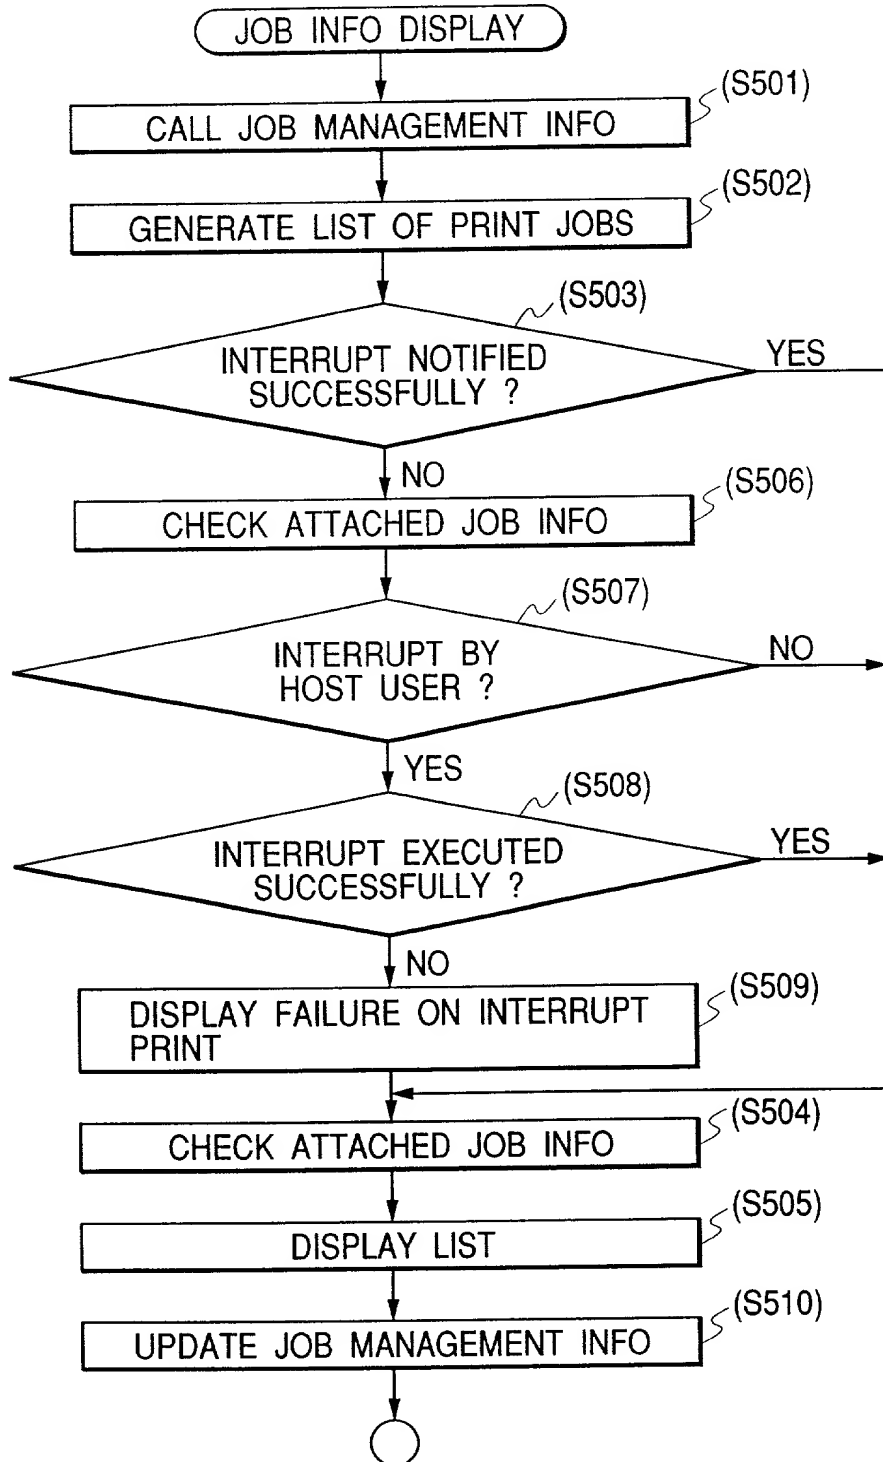


FIG. 6


JOB			
OPTION (O) HELP (H)			
PRINTER STATUS IN-SPOOLER JOB		IN-DEVICE JOB PORT	
 <p>DOCUMENT : WWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWW OWNER : WWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWW SIZE : WWWWW KB</p>			
DOCUMENT	STATUS	OWNER	SIZE
▶ SUM 1.x0s	PRINTING	THIRO	32
○ SUM 1.x0s	WAITING	THIRO	32
○ SUM 1.x0s	WAITING	THIRO	32

FIG. 7

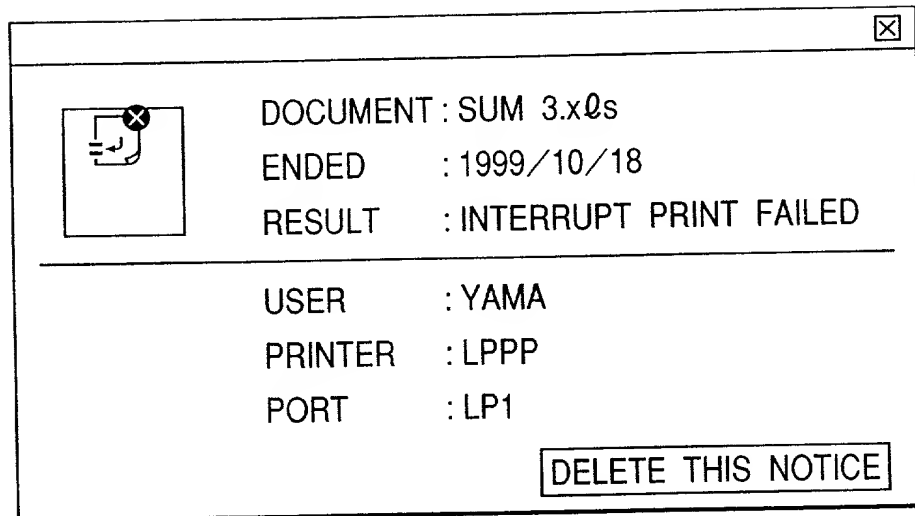


FIG. 8

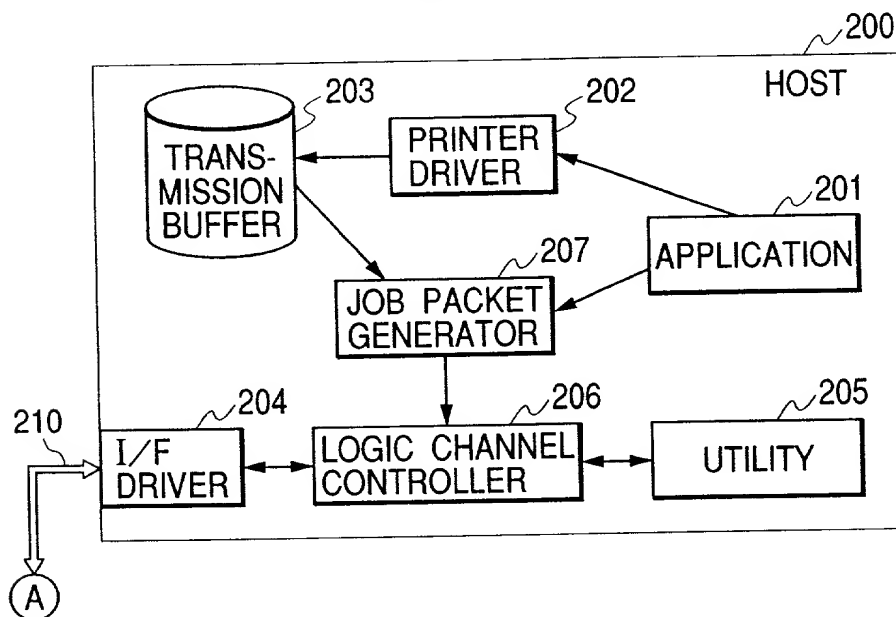


FIG. 9

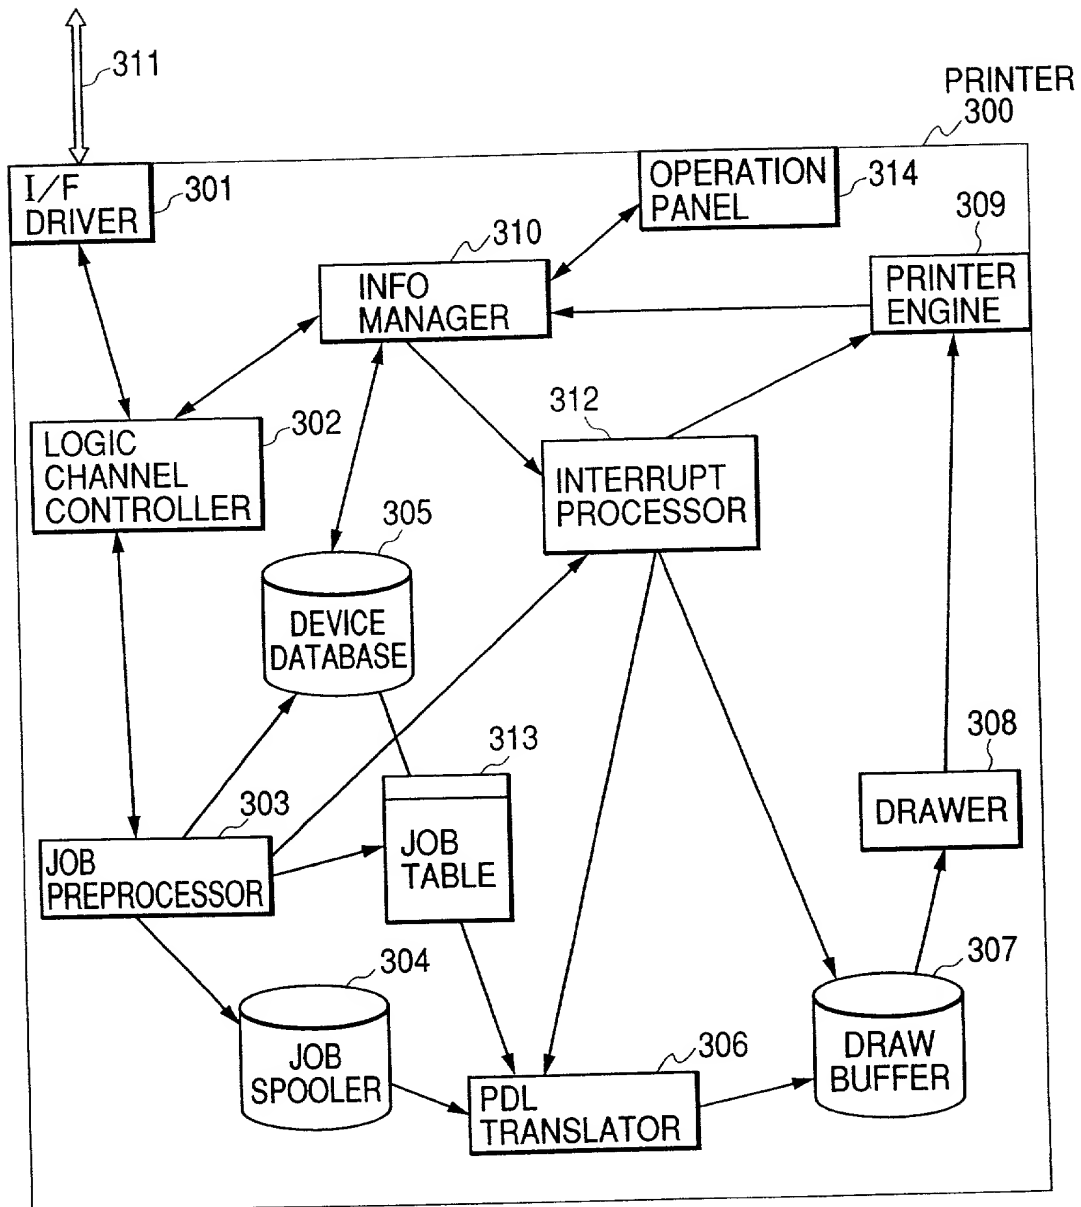


FIG. 10

PROPERTY OF PRINTER

?

X

MAIN

PAPER

LAYOUT

DEVICE OPTION

OVERLAY

EJECT

PAGE COMPOSER

JOB MODE :

PRINT (R)

INTERRUPT PRINT (I)

BIN SORTER (L)

PAPER EJECTION (F) :

NO REGISTRATION

DELIVER TO (O) :

EJECTION TRAY

PRINT COPY BY COPY USING HD (M)

RETURN TO DEFAULT (D)

OK

CANCEL

ADAPT (A)

HELP

FIG. 11

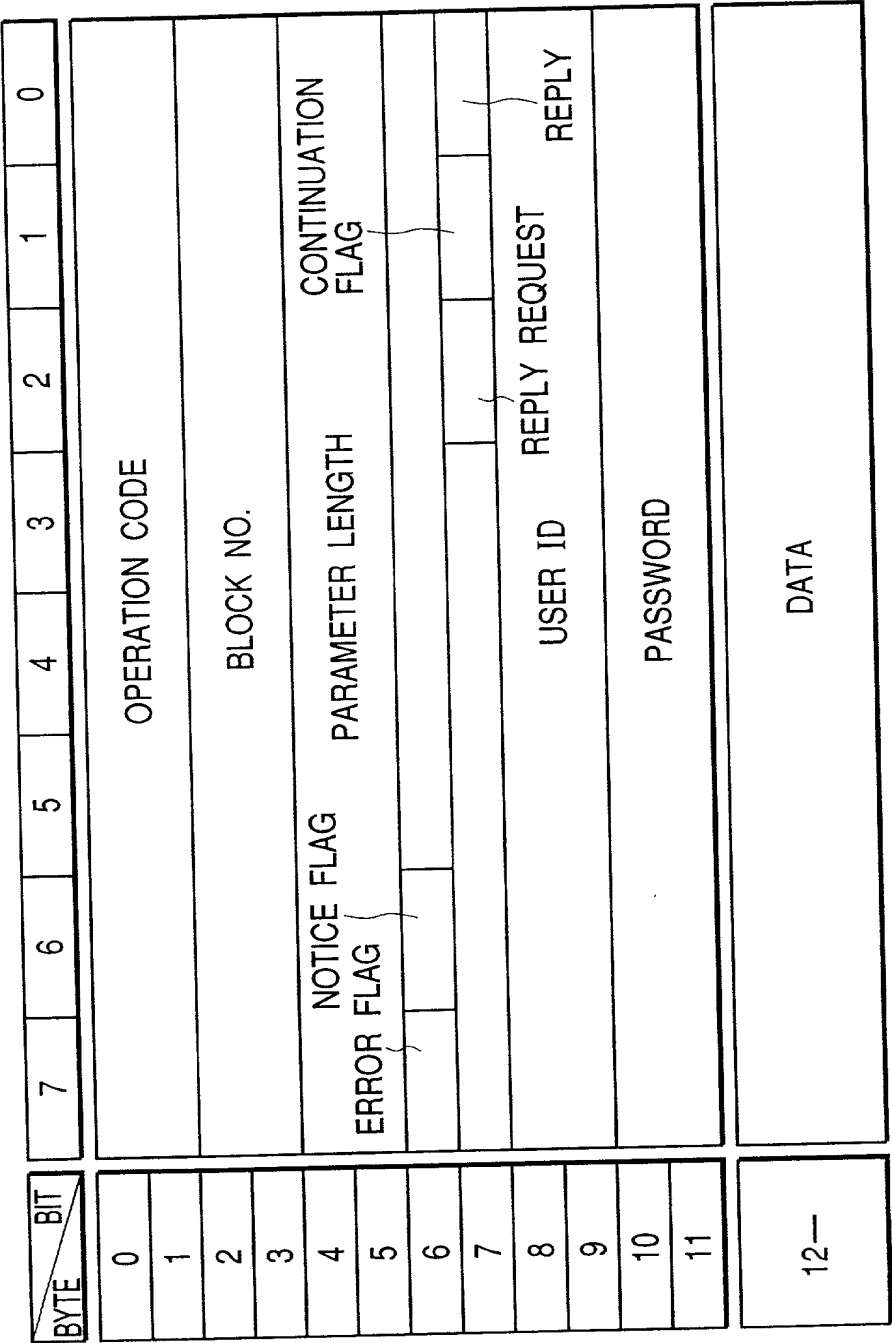


FIG. 12

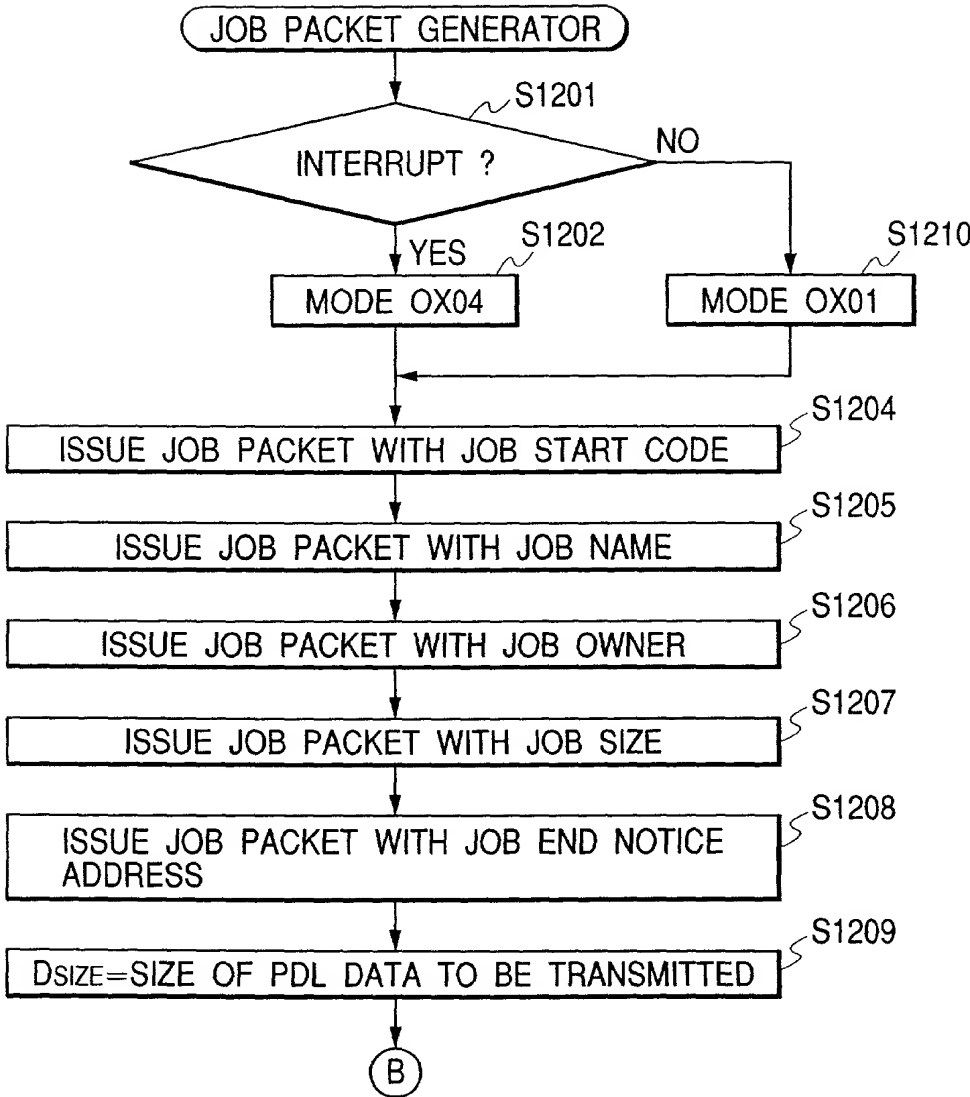


FIG. 13

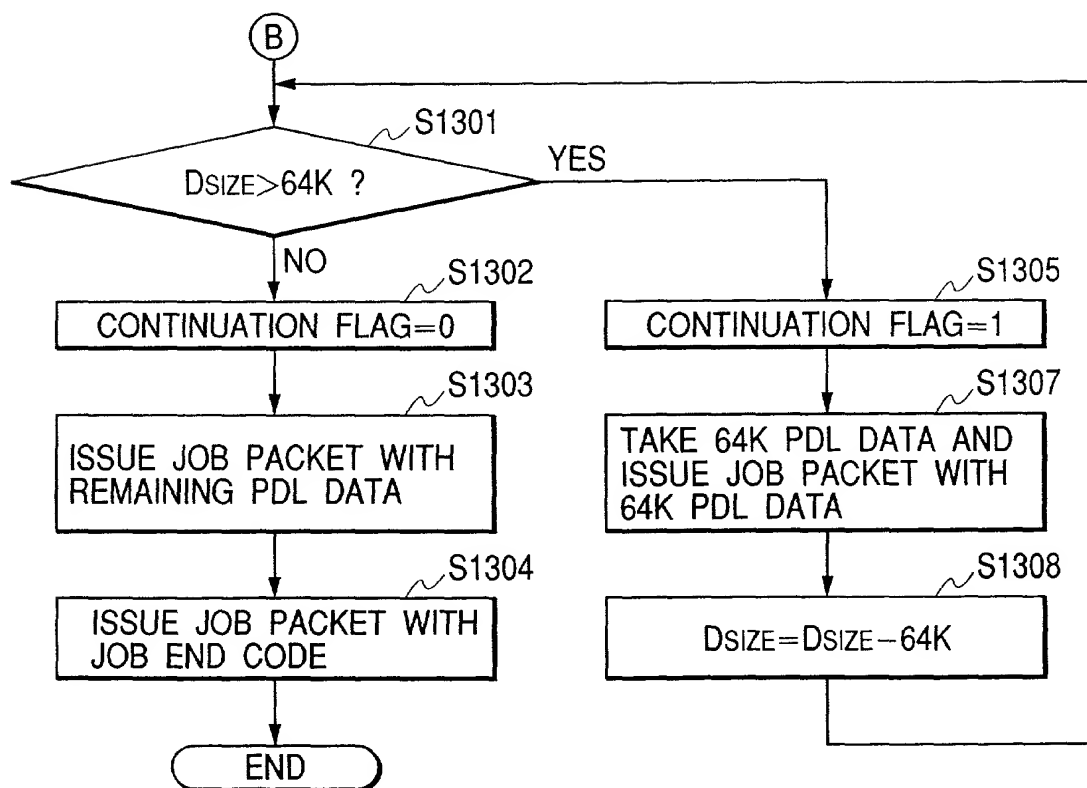


FIG. 14

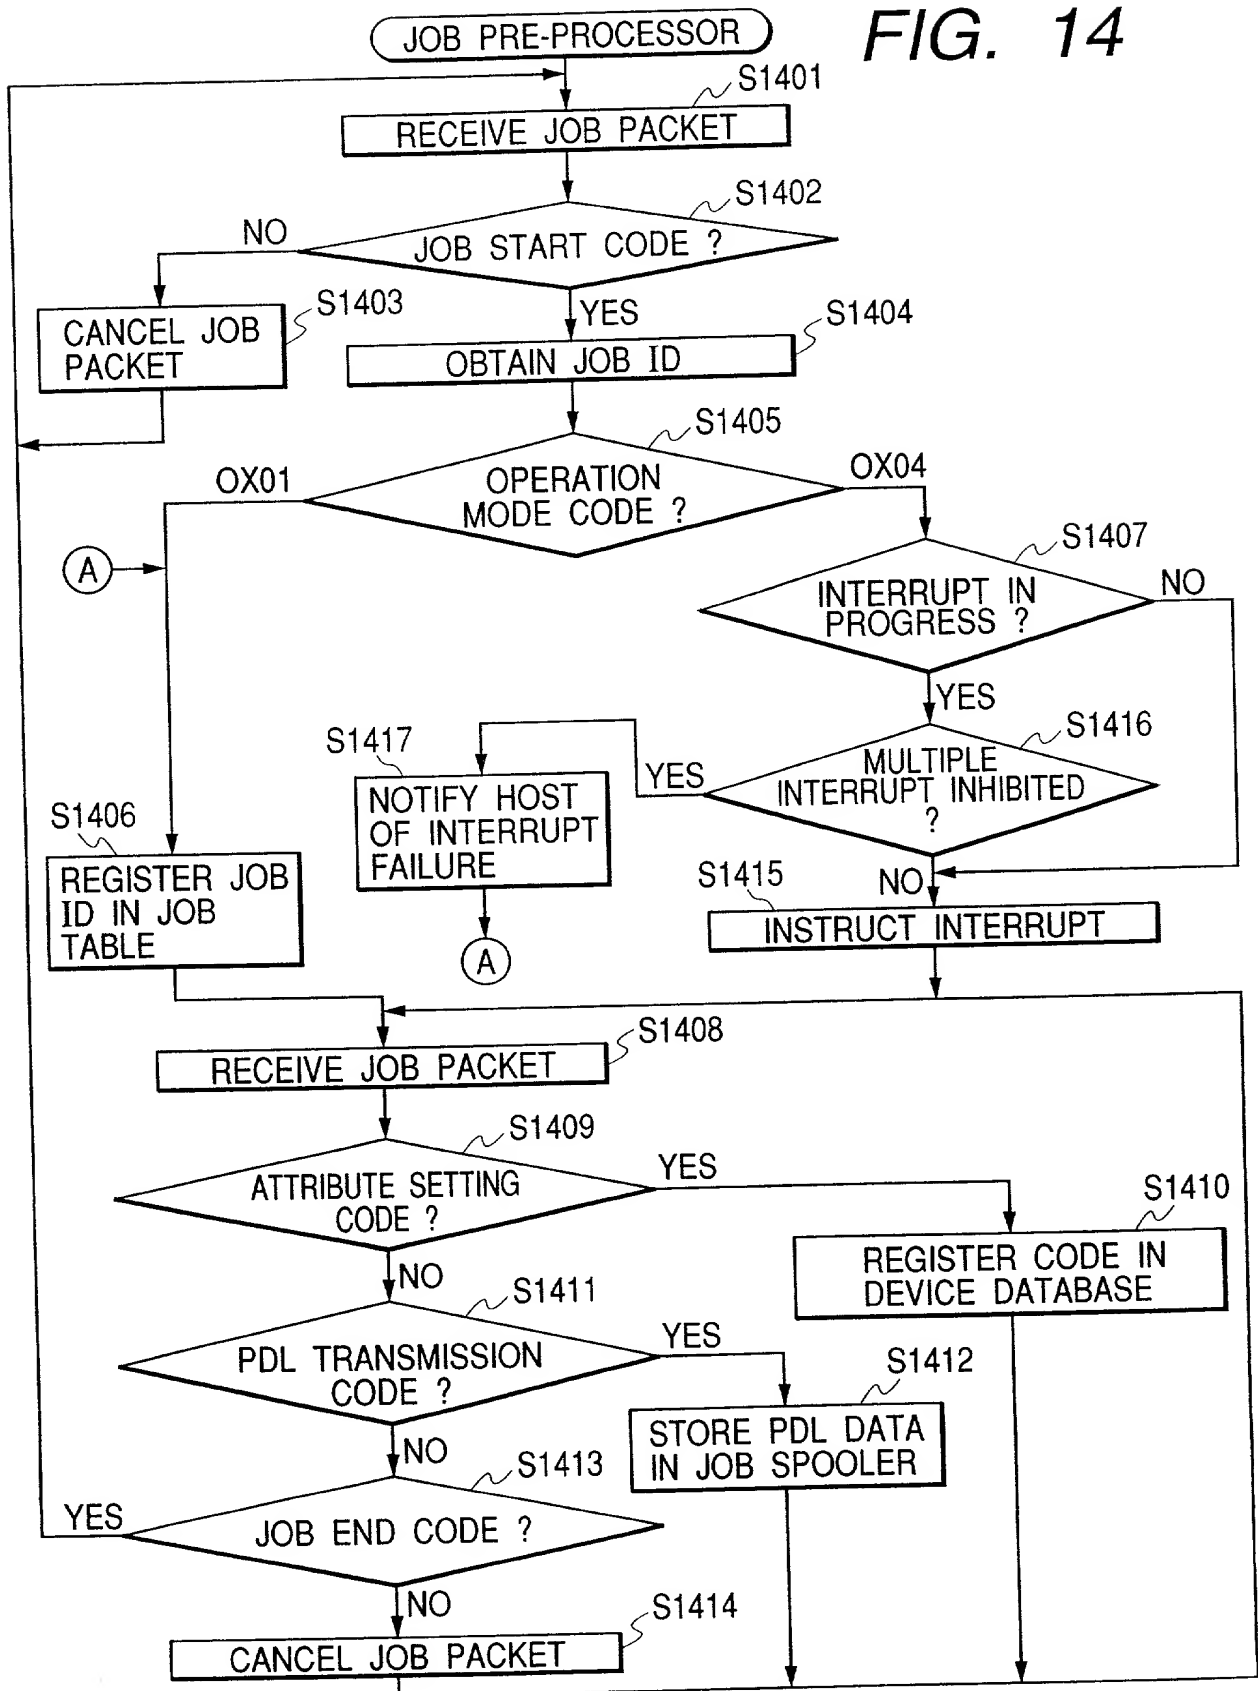


FIG. 15

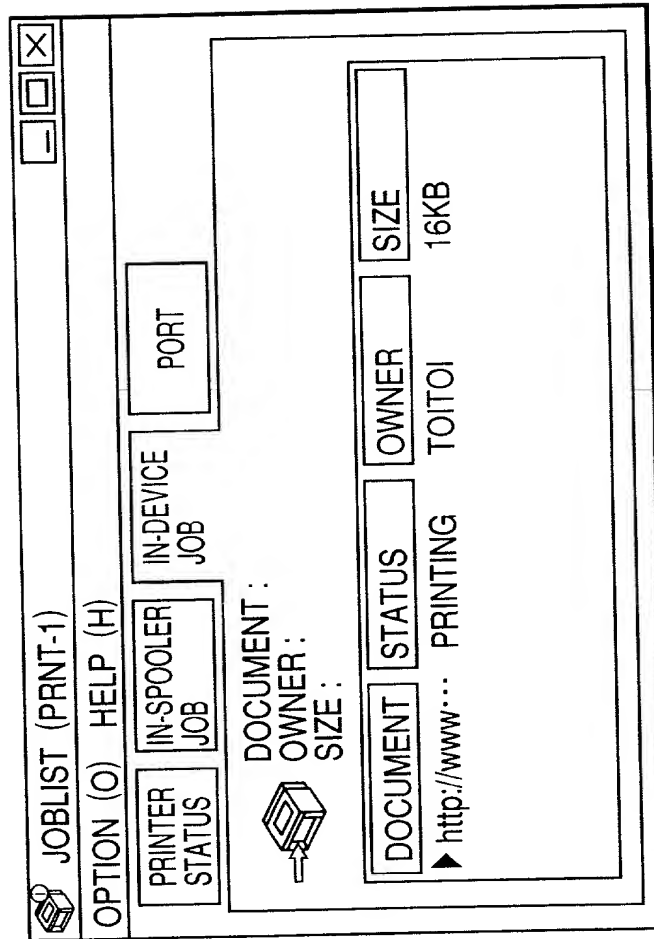


FIG. 16

POINTER
1601

JOB ID	SUSPENSION FLAG
1	F
2	F
3	F
4	F

16-1

POINTER
1601

JOB 5
ADDED

JOB ID	SUSPENSION FLAG
1	F
2	F
3	F
4	F
5	F

16-2

POINTER
1601

JOB ID	SUSPENSION FLAG
2	F
3	F
4	F
5	F

JOB 1 PRINTED
OR CANCELLED

16-3

FIG. 17

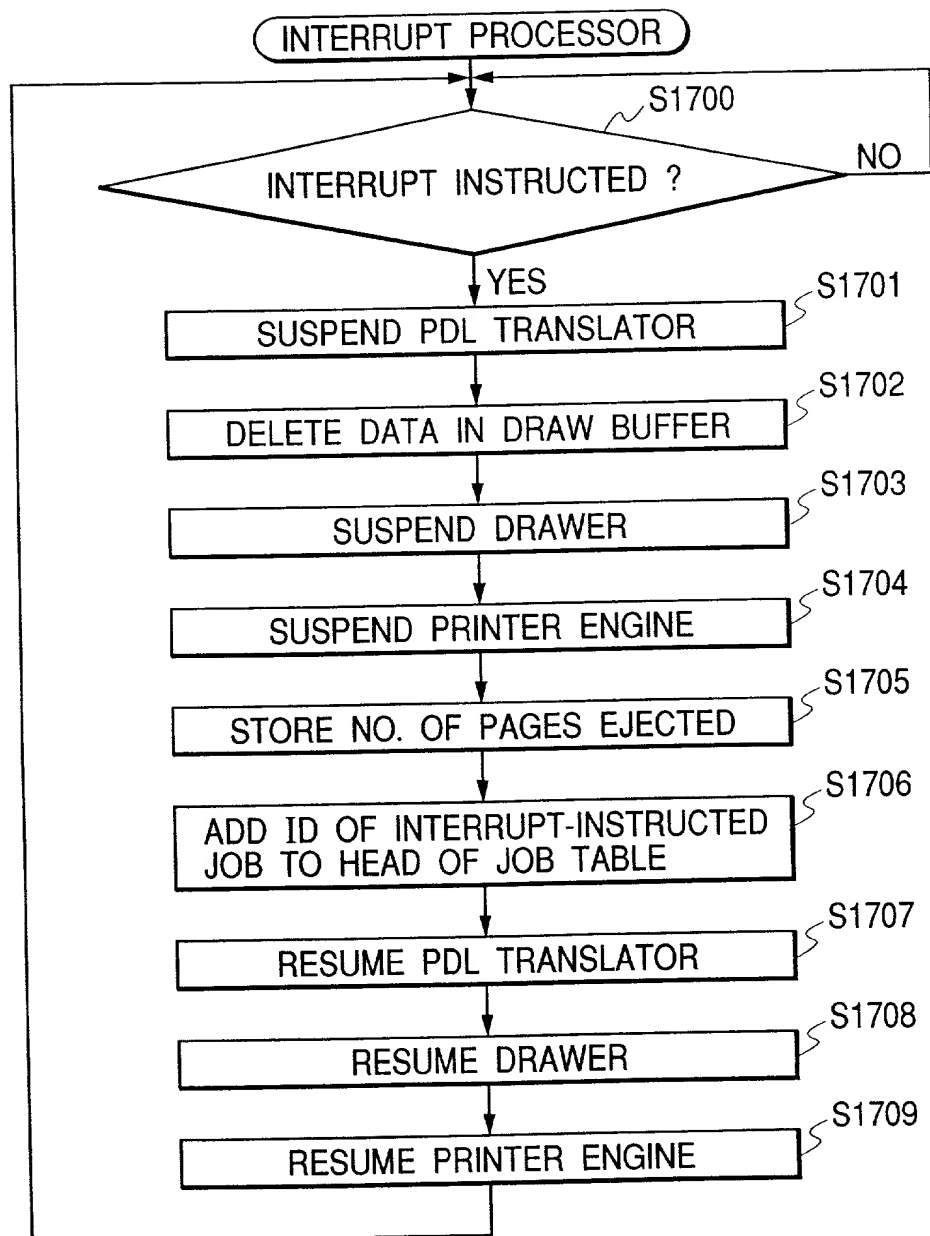


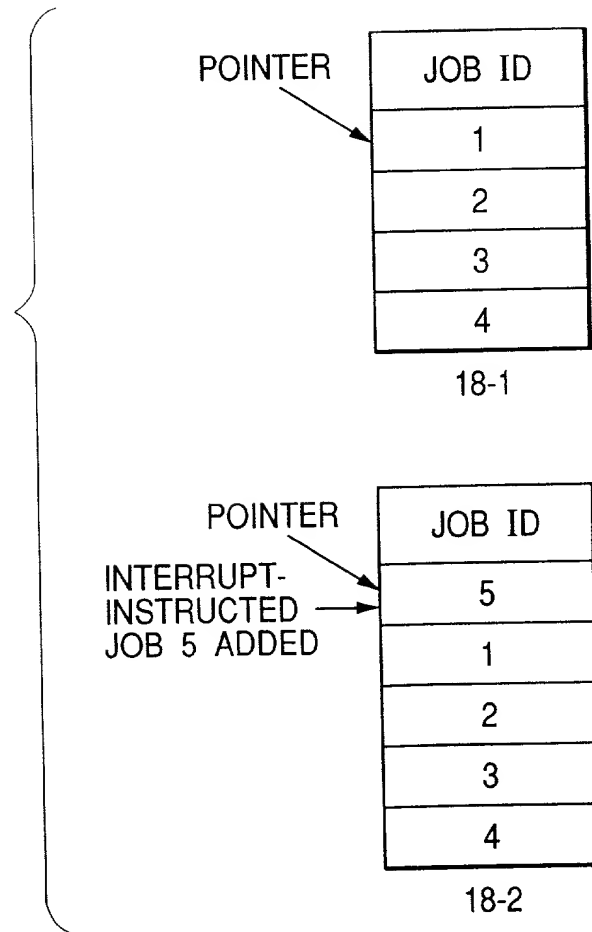
FIG. 18

FIG. 19

MEMORY MAP OF MEM MEDIUM
(FD, CD-ROM ETC.)

DIRECTORY
PROGRAM CODES FOR FLOWCHART OF FIG. 3
PROGRAM CODES FOR FLOWCHART OF FIG. 4
PROGRAM CODES FOR FLOWCHART OF FIG. 5
PROGRAM CODES FOR FLOWCHART OF FIGS. 12 AND 13
PROGRAM CODES FOR FLOWCHART OF FIG. 14
PROGRAM CODES FOR FLOWCHART OF FIG. 17

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled INFORMATION PROCESSOR AND PRINTER the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
JAPAN	11-264900	20 SEPTEMBER 1999	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	---------------------------------------

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Tomohiro GOMI

Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 5-7-403, Nakamachidai 3-chome, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

CPW\cmv